




METAL STAMP TO READ:  1. 4/0 2. CU 3. "SUFFIX" 4. "STUD HOLE" 5. DB
6. <b>(UL</b> )
7. <b>(F)</b>

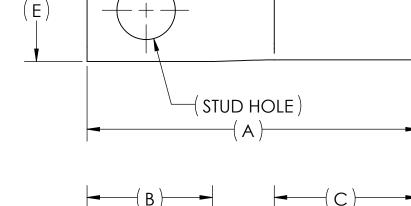

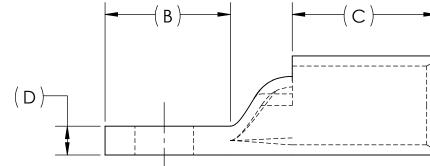


## NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION 3.
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41

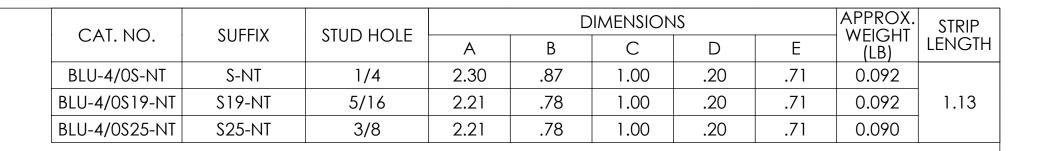


INK STAMP REFERENCE









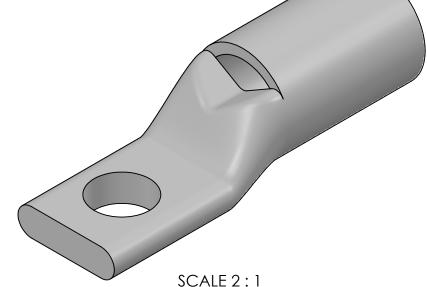

**USE BELOW OPTIONAL SUFFIXES FOR** ALTERNATE LUG CONFIGURATIONS:

-FL FOR FLARED BARREL ENTRY

-45 FOR 45° BENT PAD -90 FOR 90° BENT PAD

-U FOR UNDRILLED PAD

EXAMPLE: BLU-4/0S25-NT-FL





