



## INK STAMP REFERENCE



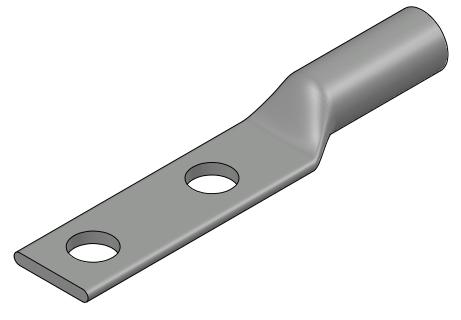



## NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 8. CONNECTORS ARE UL LISTED PER UL486A-B FOR POWER APPLICATIONS UP TO 90°C
- 9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
- 10. CONNECTORS ARE DESIGNED FOR USE WITH CORRESPONDING BBLS SERIES LUGS
- 11. APPROXIMATE WEIGHT: 0.269 LBS



ECN

**REVISIONS** 

				Χ		COPPER TUBING							
	QTY.				PT.	NAME OR DESCRIPTION							
						BOTTOM STACKING LUG							
						for							
						250 MCM COPPER CONDUCTORS							
						REF. DWG'S: 2H52-56433 H:\2H52\BBLB-025D							
							DRAWN BY: DT		DT	DATE: 8/8/2023	CHK'D	QJB	
				-025D	0	PENNŮNION"	SCALE: 1	:1	INTERP	RET PER ASME Y14.5-20	09 FILE:	2H52	
ATE	-			-02	Ž		SIZE: B	Ğ.		DDID 00E	_	REV.	
/AIL				BBLB	CAT	229 WATERFORD STREET EDINBORO, PA 16412 USA	$\oplus \Box$			BBLB-025D		_	
			,										

RoHS

**COMPLIANT**