


BBLU-030D-NT	REV.	CAT. NO.	SUFFIX	STUD HOLE			DIMEN	ISIONS			APPROX. WEIGHT	STRIP LENGTH	
		CAI. NO.	SULLIX	310D HOLE	Α	В	С	D	Е	F	(LB)		
		BBLU-030D-2TC14E2-NT	2TC14E2	1/4	3.92	1.36	2.00	.22	.83	.75	0.221	0.12	
	—METAL STAMP TO READ:	BBLU-030D-2TC38-NT	2TC38	3/8	4.39	1.83	2.00	.22	.83	1.00	0.238	2.13	

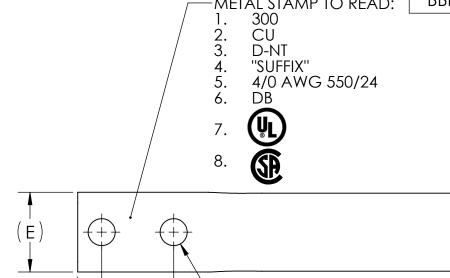

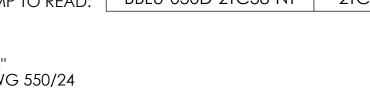


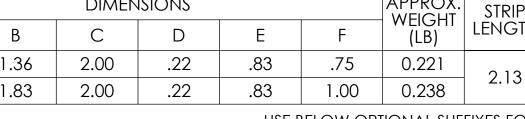


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS: -45 FOR 45° BENT PAD -90 FOR 90° BENT PAD -FL FOR FLARED BARREL ENTRY -U FOR UNDRILLED PAD


EXAMPLE: BBLU-030D-2TC14E2-NT-FL

INK STAMP REFERENCE WHITE

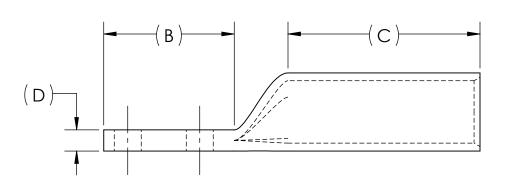

( STUD HOLE )



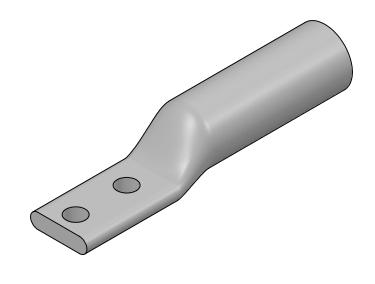

## **NOTES:**

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY

(F)-

- BEVELED ENTRY FOR EASY CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**



COPPER TUBING							
PT. NAME OR DESCRIPTION	PT.	Y.	Q				
LONG BARREL NARROW TONGUE LUG							
for							
300 MCM COPPER CONDUCTORS							
REF. DWG'S: 2H08-56136 H:\2H08\BBLU-030							
DRAWN BY: DT DATE: 7/14/2023 CHK'D: $Q$ ,							
SCALE: 1:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H	o.	빌					
	Z.	TABL			DATE	ECN	NO.
	X	SEE .		-		REVISION	140.
O   EDINDORO, FA 10412 03A   +	10	I S			110	KL VISION	