


DWG.	BBLU-035D	REV.	REV.	CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS						APPROX.	STRIP
							Α	В	С	D	E	F	− WEIGHT   (LB)	LENGTH
	METAL STAMP TO READ: 1. 350 2. CU			BBLU-035D2TC14E2	2TC14E2	1/4	4.02	1.36	2.00	.17	1.28	.75	0.267	2.13
				BBLU-035D2TC38	2TC38E3	3/8	4.49	1.83	2.00	.17	1.28	1.00	0.291	
				BBLU-035D	-	1/2	5.66	3.00	2.00	.17	1.28	1.75	0.361	



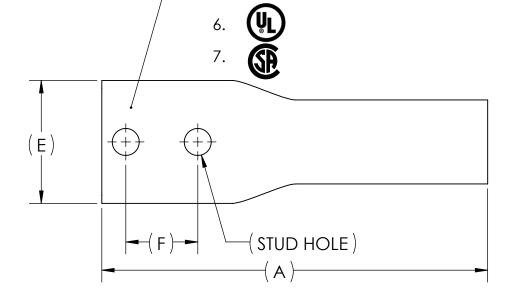

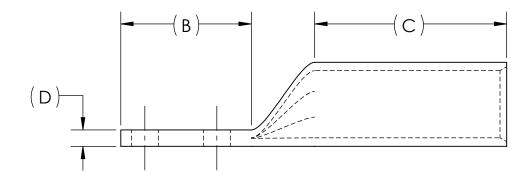


INK STAMP REFERENCE



USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS: -45 FOR 45° BENT PAD -90 FOR 90° BENT PAD

- -FL FOR FLARED BARREL ENTRY
  -U FOR UNDRILLED PAD
- EXAMPLE: BBLU-035D2TC14E2-FL

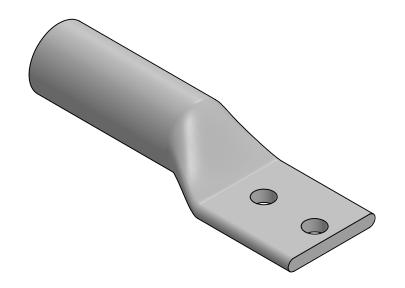

## NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467

