



DWG. NO. **BBLU-050S-NT** REV. -





CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS					APPROX. WEIGHT (LB)	STRIP LENGTH
			A	B	C	D	E		
BBLU-050S3-NT	S3-NT	3/8	4.16	1.25	2.25	.26	1.06	0.407	2.38
BBLU-050S2-NT	S2-NT	1/2	4.16	1.25	2.25	.26	1.06	0.400	

METAL STAMP TO READ:

1. 500
2. CU
3. "SUFFIX"
4. "STUD HOLE"
5. 373 KCMIL 925/24
6. DB
7. 
8. 

USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:
 -45 FOR 45° BENT PAD
 -90 FOR 90° BENT PAD
 -FL FOR FLARED BARREL ENTRY
 -U FOR UNDRILLED PAD
 EXAMPLE: BBLU-050S3-NT-FL

INK STAMP REFERENCE

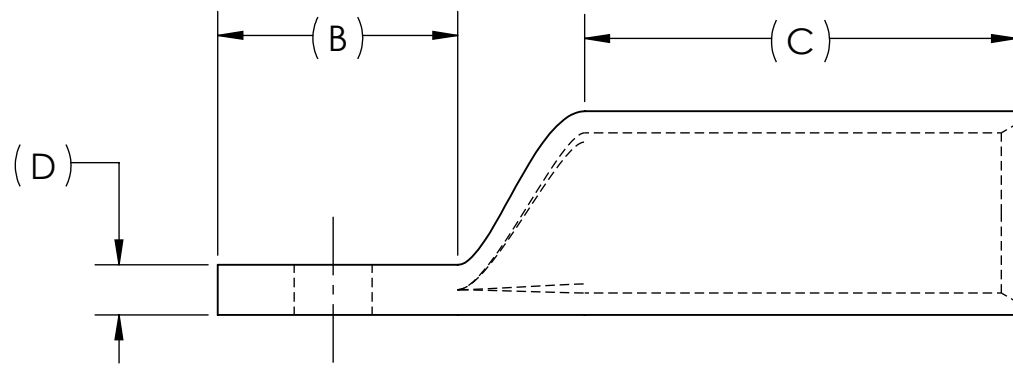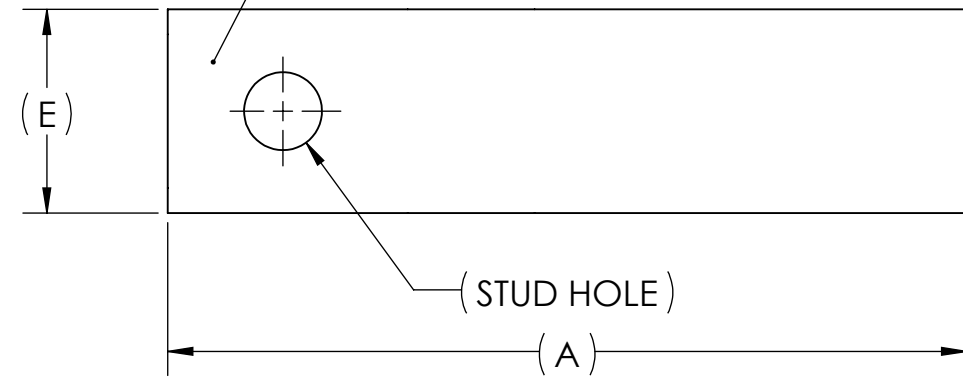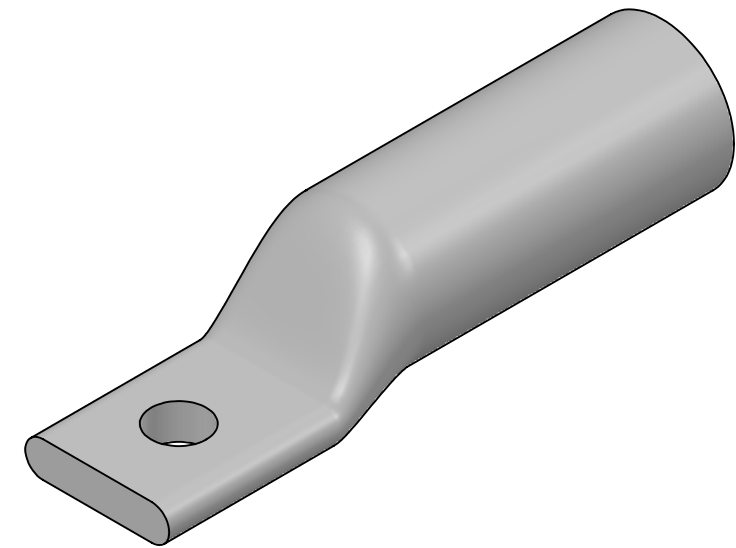



NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED TO INHIBIT CORROSION
4. RATED FOR COPPER CONDUCTORS ONLY
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467



NO.	ECN	DATE
REVISIONS		

			X	COPPER TUBING						
		QTY.	PT.	NAME OR DESCRIPTION						
				PENN-CRIMP LUG for 500 MCM COPPER CONDUCTORS						
				REF. DWG'S: 5H08-96562			H:\5H08\BBLU-050S-NT			
				DRAWN BY: DT		DATE: 7/13/2023		CHK'D: QJB		
				SCALE: 1:1		INTERPRET PER ASME Y14.5-2009			FILE: 5H08	
				SIZE: B				DWG. NO. BBLU-050S-NT		REV. -
				 229 WATERFORD STREET EDINBORO, PA 16412 USA						