




DWG. NO. **BBLU-065D** REV. **-**

REV.	CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS						APPROX. WEIGHT (LB)	STRIP LENGTH
				A	B	C	D	E	F		
01	BBLU-065D2TC38	2TC38	3/8	5.51	1.83	2.81	.27	1.78	1.00	0.793	2.94
04	BBLU-065D	-	1/2	6.68	3.00	2.81	.27	1.78	1.75	0.952	





METAL STAMP TO READ:

1. 650
2. CU
3. D
4. "SUFFIX"
5. 
6. 

USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:
 -45 FOR 45° BENT PAD
 -90 FOR 90° BENT PAD
 -FL FOR FLARED BARREL ENTRY
 -U FOR UNDRILLED PAD
 EXAMPLE: BBLU-065D2TC38-FL

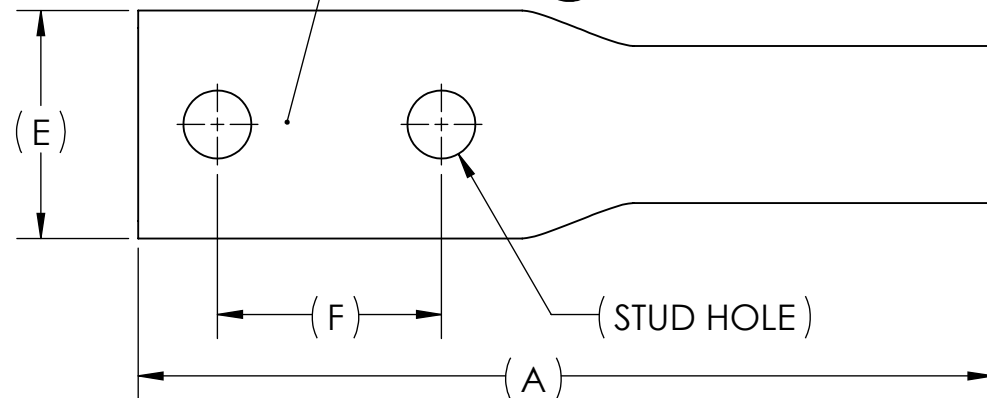

INK STAMP REFERENCE

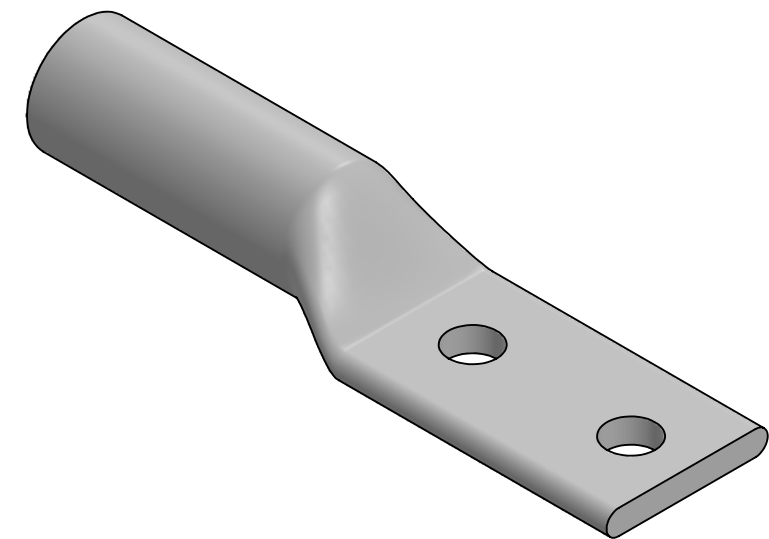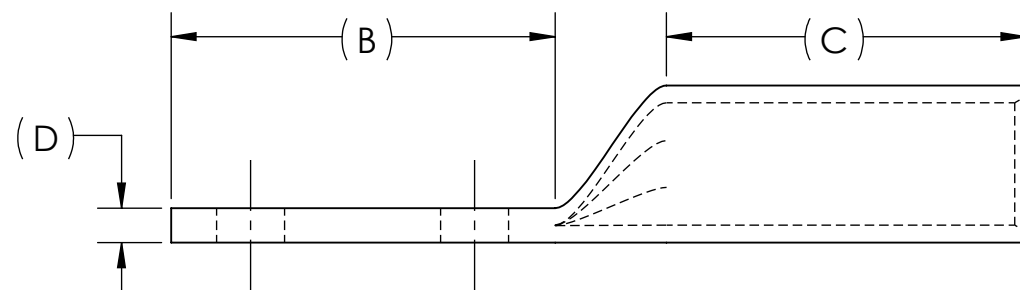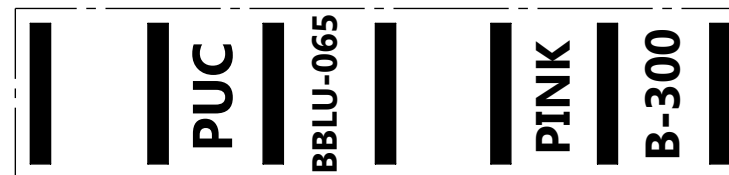

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED TO INHIBIT CORROSION
4. RATED FOR COPPER CONDUCTORS ONLY
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



NO.	ECN	DATE
REVISIONS		

QTY.	PT.	NAME OR DESCRIPTION
	X	COPPER TUBING
		PENN-CRIMP LUG for 650 MCM COPPER CONDUCTORS
REF. DWG'S: 2H08-54988, 2H08-54755S2		H:\2H08\BBLU-065D
DRAWN BY: DT DATE: 2/22/2023 CHK'D: QJB		
SCALE: 2:3 INTERPRET PER ASME Y14.5-2009 FILE: 2H08		
SIZE: B	DWG. NO. BBLU-065D	REV. -