

3.38 1.63 1.38 BBLU-1D 5/16 .11 .67 BBLU-1D2TC38E2 2TC38E2 3/8 3.30 1.58 1.38 .10 .67 BBLU-1D2TC38E3 2TC38E3 3.55 1.83 1.38 .67 3/8 .10 BBLU-1D2TC38 2TC38 3/8 3.55 1.83 1.38 .10 .67

Α

2.94

3.08

В

1.22

1.36

STUD HOLE

1/4

1/4

INK STAMP REFERENCE

BBLU-1

GREEN

USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

APPROX.

WEIGHT

(LB)

0.057

0.060

0.067

0.060

0.065

0.065

STRIP

LENGTH

1.50

-45 FOR 45° BENT PAD

DIMENSIONS

D

.10

.10

Ε

.67

.67

С

1.38

1.38

-90 FOR 90° BENT PAD

F

.63

.75


88.

.75

.81

1.00

- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD
- EXAMPLE: BBLU-1D2TC14E2-FL






SUFFIX

2TC14

2TC14E2

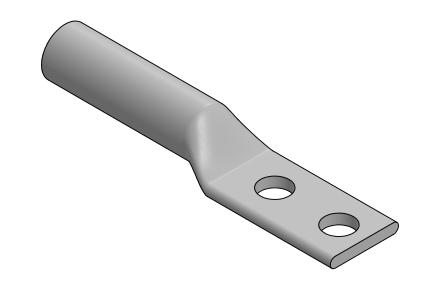

NOTES:

(D)

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS

- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION 6.
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



							DRAW
				F	0	PENNŮNION™	SCAL
		D.175		AB	Ž		SIZE:
NO.	ECN	DATE		E 1		229 WATERFORD STREET	A -
	REVISIO		SEI	C/	EDINBORO, PA 16412 USA	₩ <u> </u>	
		-				_	

COPPER TUBING QTY. NAME OR DESCRIPTION PENN-CRIMP LUG for 1 AWG COPPER CONDUCTORS REF. DWG'S: 2H08-55046, 2H08-55045, 2H08-54980, 2H08-55044, 2H08-55043, 2H08-31542 H:\2H08\BBLU-1D DATE: 2/22/2023 CHK'D: QJB WN BY: DT LE: 3:2 | INTERPRET PER ASME Y14.5-2009 | FILE: 2H08 REV. DWG. BBLU-1D \exists