




-45 FOR 45° BENT PAD


- -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD EXAMPLE: BBLU-2/0D-2TC14E2-NT-FL

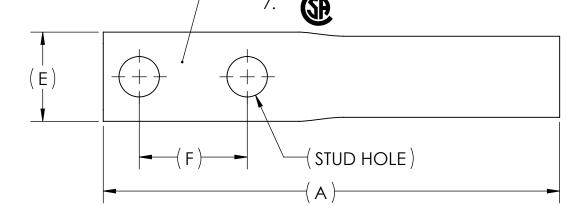


6.

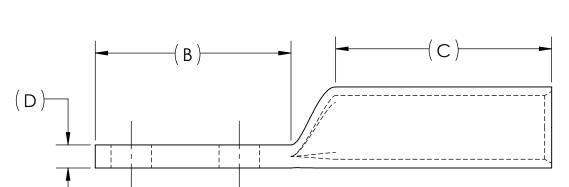



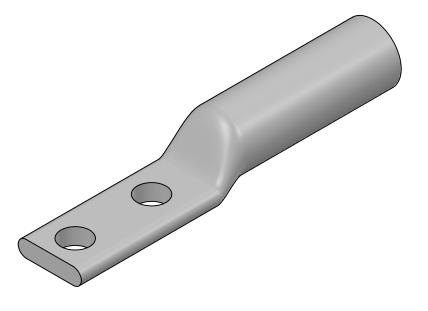



NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY 4.
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV 6.
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 10. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



| | | | Х | | COPPER TUBING | |
|--------------------|-----------------------------|--|---------|---------------------|------------------------|---|
| | QTY. | | PT. | NAME OR DESCRIPTION | | |
| | LONG BARREL NARROW TONGUE L | | | | EL NARROW TONGUE LUG | |
| | | | | | | for |
| | | | | | 2/0 AWG | COPPER CONDUCTORS |
| | | | | | REF. DWG'S: 2H08-56157 | H:\2H08\BBLU-2.0D-NT |
| | | | | | | DRAWN BY: DT DATE: 7/14/2023 CHK'D: QJB |
| | | | ABLE | o. | PENNŮNION | SCALE: 3:2 INTERPRET PER ASME Y14.5-2009 FILE: 2H08 |
| ECN DATE REVISIONS | | | SEE TAB | AT. N | 229 WATERFORD STREET | SIZE: B S S BBLU-2/0D-NT - REV |
| REVISIONS | | | | | | |