

CAT. NO.	SUFFIX	STUD HOLE		D	APPROX. WEIGHT	STRIP			
			Α	В	С	D	Е	(LB)	LENGTH
BBLU-2S9-NT	S9-NT	#10	2.25	.75	1.22	.13	.50	0.043	
BBLU-2S2-NT	S2-NT	1/4	2.25	.75	1.22	.13	.50	0.042	1.38
BBLU-2S-NT	S-NT	5/16	2.25	.75	1.22	.13	.50	0.041	


**USE BELOW OPTIONAL SUFFIXES FOR** ALTERNATE LUG CONFIGURATIONS:


- -45 FOR 45° BENT PAD -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD

EXAMPLE: BBLU-2S9-NT-FL







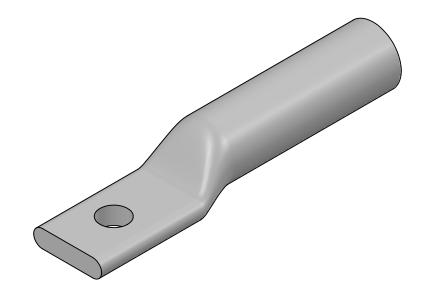

## **NOTES:**

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 10. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



QTY.	PT.	NAME OR DESCRIPTION					
		PENN-CRIMP LUG					
		for					
		2 AWG COPPER CONDUCTORS					
		REF. DWG'S: 2H08-56172 H:\2H08\BBLU-2S-NT					
		DRAWN BY: DT DATE: 7/11/2023 CHK'D: QJB					
	0	PENNLINION SCALE: 2:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H08					
NO. ECN DATE REVISIONS	CAT. N	229 WATERFORD STREET EDINBORO, PA 16412 USA SIZE: B SI					
AND IS TO BE USED COLENY FOR THE PURPOSE FOR MUICILITIES FURNISHED AND AND THE PETUDISED							

COPPER TUBING