

CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS					APPROX. WEIGHT	STRIP
			Α	В	С	D	Е	(LB)	LENGTH
BBLU-4S5-NT	S5-NT	#10	2.06	.69	1.09	.11	.40	0.027	1.25
BBLU-4S-NT	S-NT	1/4	2.06	.69	1.09	.11	.40	0.026	1.23


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS: -45 FOR 45° BENT PAD -90 FOR 90° BENT PAD


-FL FOR FLARED BARREL ENTRY

-U FOR UNDRILLED PAD EXAMPLE: BBLU-4S5-NT-FL

INK STAMP REFERENCE



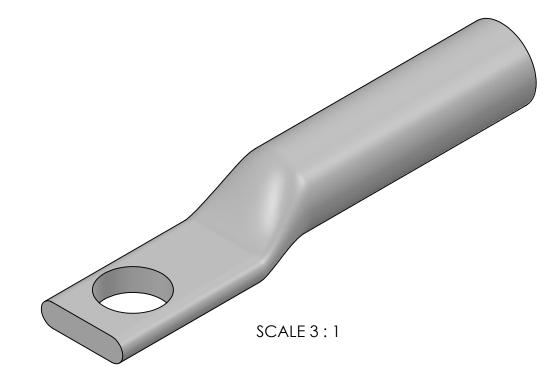



NOTES:

(D)

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION 3.
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER 7. FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 10. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



	QTY.		PT.	NAME OR DESCRIPTION					
					PENN-CRIMP LUG				
	for			for					
	4 AWG COPPER CONDUCTORS		COPPER CONDUCTORS						
				REF. DWG'S: 2H08-56178 H:\2H08\BBLU-4					
ລ				DRAWN BY: DT DATE:		DRAWN BY: DT DATE: 7/11/2023 CHK'D: QJB			
		PENNŮNION™	SCALE: 2:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H08						
NO.	ECN DATE REVISIONS		SEE TAR	229 WATERFORD STREET EDINBORO, PA 16412 USA	SIZE: B S S S BBLU-4S-NT REV.			

COPPER TUBING