




STUD HOLE



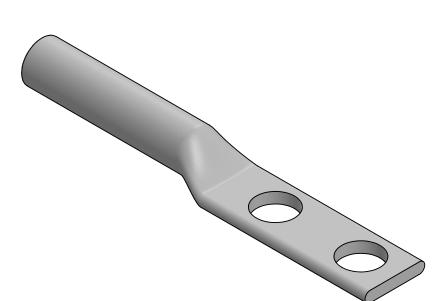

NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
- 10. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



			Χ		COPPER TUBING			
	QTY. F			PT.	. NAME OR DESCRIPTION			
					PENN-CRIMP LUG			
	for							
					5 AWG COPPER CONDUCTORS			
					REF. DWG'S: 2H08-55032, 2H08-55033, 2H08-54979, 2H08-55034, 2H08-55008 H:\2H08\BBLU-5D			
					₹	DRAWN BY: DT	DATE: 2/22/2023 CH	IK'D: QJB
			ΣΈ	0	PENNÚNION™	SCALE: 2:1 INTERP	RET PER ASME Y14.5-2009	FILE: 2H08
DATE			SEE TABLE	:AT. N	229 WATERFORD STREET EDINBORO, PA 16412 USA	SIZE: B S O	BBLU-5D	REV.
			S	\cup	EDIINDUKU, PA 16412 USA	+		