


	METAL STAMP TO REA  1. 300 2. CU 3. "SUFFIX" 4. "STUD HOLE" 5. 4/0 AWG 550/24 6. DB  7. 48							
(E)								
	(STUD HOLE)							




	7. <b>1</b> 8. <b>3</b>
(E)	
	(STUD HOLE)

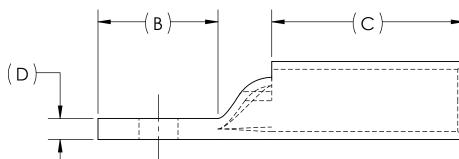

## NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**

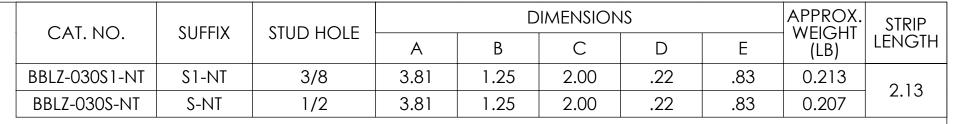



USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:


- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD
- EXAMPLE: BBLZ-030S1-NT-FL

INK STAMP REFERENCE



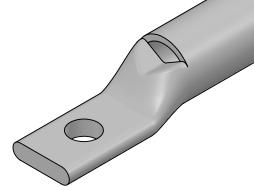



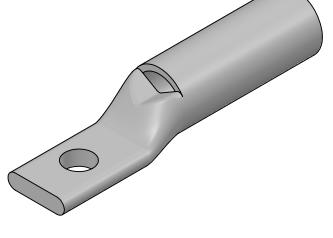



	QTY. F		PT.	NAME OR DESCRIPTION										
					LONG BARREL NARROW TONGUE LUG									
					for									
					300 MCM COPPER CONDUCTORS									
				REF. DWG'S: 2H02-56135 H:\2H								H02\BBL	Z-030S-NT	
					<b>₹</b>	DRAWN BY: DT DATE: 7/18/2023 CHK'						:QJB		
			BLE	0	<b>PENNŮNION</b>	SCALE: 1	l:1 lì	NTER	PRET PE	r asme	Y14.5-20	009 FILE	: 2H02	
ECN DATE			SEE TAB	AT. N	229 WATERFORD STREET	SIZE: B	WG.	j	BBL	Z <b>-</b> 0	30S	-NT	REV.	
REVISIONS	E DUDDO	) ) (F F (		<u> </u>	EDINBORO, PA 16412 USA	1								

COPPER TUBING