


		METAL STAMP TO READ: 1. 600 2. CU 3. "SUFFIX" 4. "STUD HOLE" 5. 444 KCMIL 1100/24 6. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.				
(E)		—(STUD HOLE)				
	(A)					

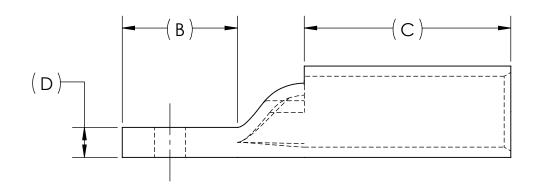

NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION 3.
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C

CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS				APPROX. WEIGHT	SIKIP	
			Α	В	С	D	Е	(LB)	LENGTH
BBLZ-060S3-NT	S3-NT	3/8	5.06	1.50	2.69	.39	1.19	0.697	2.81
BBLZ-060S2-NT	S2-NT	1/2	5.06	1.50	2.69	.39	1.19	0.686	2.01

USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS: -45 FOR 45° BENT PAD

- -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD EXAMPLE: BBLZ-060S3-NT-FL

INK STAMP REFERENCE



