



"SUFFIX"

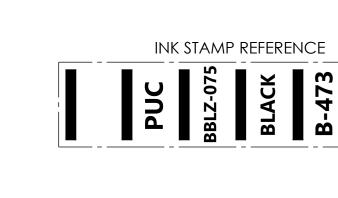

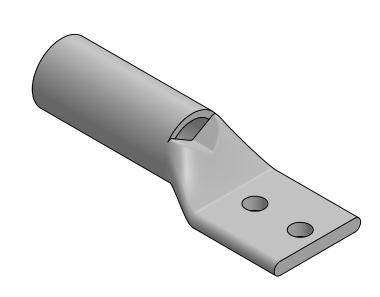


ALTERNATE LUG CONFIGURATIONS:


-FL FOR FLARED BARREL ENTRY

-45 FOR 45° BENT PAD

-90 FOR 90° BENT PAD

-U FOR UNDRILLED PAD EXAMPLE: BBLZ-075D2TC38-FL

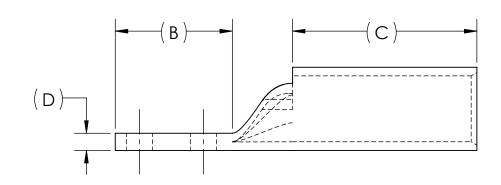



NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



				'BLE	O	P
NO.	ECN	DATE		√1 ∃	T. I	2
REVISIONS				ЭS	√)	El

COPPER TUBING NAME OR DESCRIPTION QTY. PENN-CRIMP LUG for 750 MCM COPPER CONDUCTORS REF. DWG'S: 2H02-55201, 2H02-55202 H:\2H02\BBLZ-075D DATE: 6/12/2023 CHK'D: QJB DRAWN BY: DT SCALE: 2:3 | INTERPRET PER ASME Y14.5-2009 | FILE: 2H02 REV. SIZE: B DWG. BBLZ-075D 229 WATERFORD STREET DINBORO, PA 16412 USA