


APPROX. **DIMENSIONS STRIP SUFFIX WEIGHT** CAT. NO. STUD HOLE LENGTH В С D Ε Α (LB) BBLZ-1/OS .75 1.34 .73 S 5/16 2.44 .13 0.065 1.50 **S**2 2.38 1.25 3/8 .81 .13 .75 0.062 1.38 BBLZ-1/0S2 3.06 1.38 1.38 BBLZ-1/0S15 \$15 1/2 .13 .75 0.079 1.50


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD
 - EXAMPLE: BBLZ-1/0S15-FL







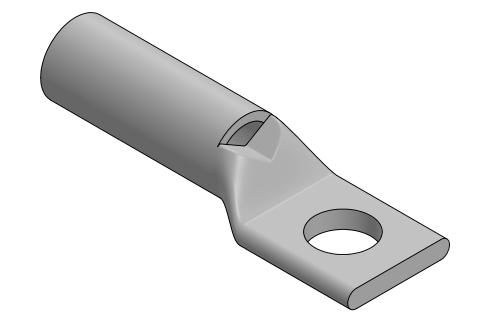

NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



		BLE	BLE	Š.	PENNÚL		
NO.	ECN	DATE			₹1 =	\T. I	229 WATERFORD
REVISIONS					SEE	C/	EDINBORO, PA 16

