




USE BELOW OPTIONAL SUFFIXES FOR **ALTERNATE LUG CONFIGURATIONS:**


- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD
- EXAMPLE: BBLZ-100D2TC38-FL

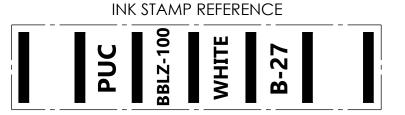

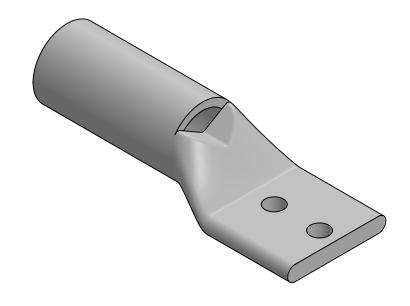

NAME OR DESCRIPTION

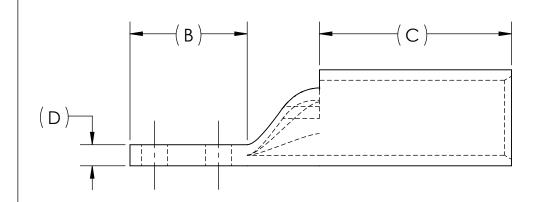



NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION 6.
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



		PENN-CRIMP LUG for			
		1000 MCM COPPER CONDUCTORS			
		REF. DWG'S: 2H02-55204, 2H02-5520)5	H:\2H02\BBI	.Z-100D
a			DRAWN BY:	DT DATE: 6/12/2023 CHK'	D: QJB
	o.	PENNÚNION	SCALE: 2:3	INTERPRET PER ASME Y14.5-2009 FIL	E: 2H02
NO. ECN DATE REVISIONS	CAT. N	229 WATERFORD STREET	SIZE: B	BBLZ-100D	REV.

COPPER TUBING

QTY.