


CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS					APPROX. WEIGHT	STRIP
			Α	В	С	D	Е	(LB)	LENGTH
BBLZ-4S5-NT	S5-NT	#10	2.06	.69	1.09	.11	.40	0.027	1.25
BBLZ-4S-NT	S-NT	1/4	2.06	.69	1.09	.11	.40	0.026	1.23


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
 -U FOR UNDRILLED PAD
- EXAMPLE: BBLZ-4S5-NT-FL

INK STAMP REFERENCE





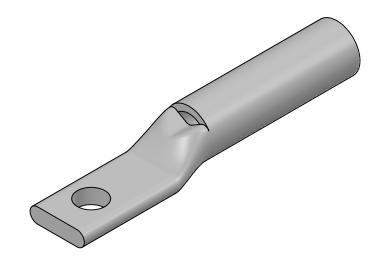

NAME OR DESCRIPTION

NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22,2 NO.41



				LONG BARREL NARROW TONGUE LUG						
				for						
				4 AWG COPPER CONDUCTORS						
				REF. DWG'S: 2H02-56179	H:\2H02\BBLZ-4\$-N					
ה					DRAWN BY: DT	DATE: 7/17/2023 C	CHK'D: QJB			
5			이 [PENNŮNION	SCALE: 2:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H02					
Г	NO. ECN DATE		TABLE I. NO.		SIZE: B	DDI 7 4C NIT	REV.			
<i></i>	REVISIONS		SEE	229 WATERFORD STREET EDINBORO, PA 16412 USA		BBLZ-4S-NT	_			

COPPER TUBING

PT.

QTY.