




REV.	CAT NO	STUD HOLE		D	APPROX.	STRIP			
	CAT. NO.		Α	В	С	D	Е	WEIGHT (LB)	LENGTH
01	BBLZ-8S2	1/4	2.00	.69	1.06	.08	.41	0.018	1.19





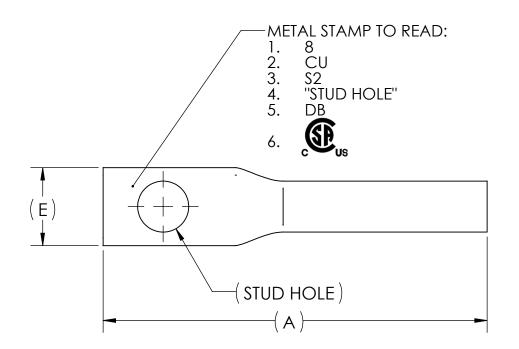



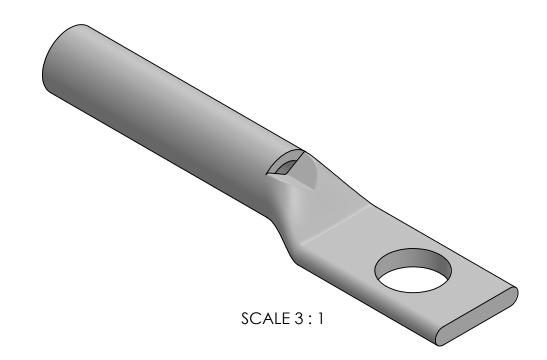


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

-FL FOR FLARED BARREL ENTRY

-45 FOR 45° BENT PAD -90 FOR 90° BENT PAD

-U FOR UNDRILLED PAD

EXAMPLE: BBLZ-8S2-FL

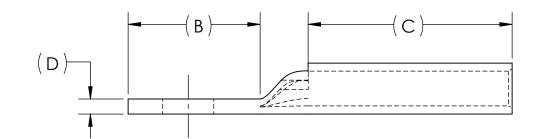

## **NOTES:**

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE cCSAus CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



				'BLE	۷Ö.	
NO.	ECN	DATE			Ţ.	
	REVISIO	4S		SEE	CA	

Ī				Χ		COPPER TUBING									
Ī		Q	TY.	Y. PT. NAME OR DESCRIPTION						RIPTION					
					PENN-CRIMP LUG										
						for									
						8 AWG COPPER CONDUCTORS									
						REF. DWG'S: 2H02-55682 H:\2H02\BBLZ									
					DRAWN E	BY:	DT	DATE: 5/23/2023 (	CHK'D:	QJB					
				쁘	Ö.	PENNŮNION*	SCALE: 2	:1	INTE	RPRET PER ASME Y14.5-2009	FILE:	2H02			
				SEE TABLE	CAT. N	229 WATERFORD STREET EDINBORO, PA 16412 USA	SIZE: B	DWG.	O N	BBLZ-8S		REV.			