


REV.	CAT. NO.	SUFFIX	STUD HOLE			APPROX. WEIGHT	STRIP			
				Α	В	С	D	Е	(LB) LEI	LENGTH
07	BLU-035S1	<b>S</b> 1	3/8	2.63	.88	1.13	.17	1.28	0.170	
80	BLU-035S	S	1/2	2.91	1.16	1.13	.17	1.28	0.184	1.25
06	BLU-035S3	\$3	5/8	3.16	1.41	1.13	.17	1.28	0.195	


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

- -45 FOR 45° BENT PAD
  - -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD
- EXAMPLE: BLU-035S1-FL

## INK STAMP REFERENCE





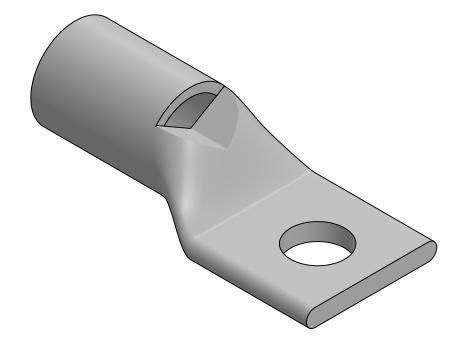

## NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV 7.
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**



				'BLE	Š.	PEN
NO.	ECN	DATE		1	\T. I	229 W <i>A</i>
REVISIONS				SEE	C/	EDINBOI

