

(D)

NOTES:

4.

7.

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION

CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV

TIN-PLATED TO INHIBIT CORROSION

RATED FOR COPPER CONDUCTORS ONLY

BEVELED ENTRY FOR EASY CABLE INSERTION

FOR VOLTAGE STRESS RELIEF INSTRUCTIONS

FOR POWER APPLICATIONS UP TO 90°C


APPLICATIONS PER UL467


SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS

FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER

CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65

10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL



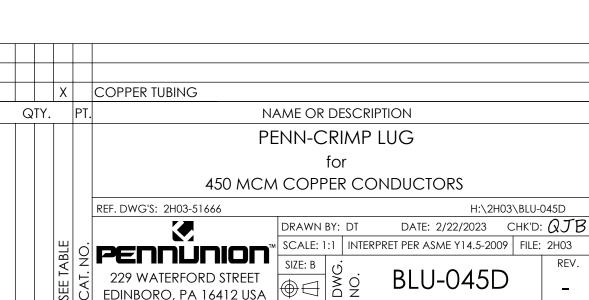

EDINBORO, PA 16412 USA

APPROX.

WEIGHT

(LB)

0.428

F

1.75

STRIP

LENGTH

1.31