

REV.	CAT. NO.	SUFFIX	STUD HOLE						APPROX. WEIGHT	STRIP
				Α	В	С	D	Е	(LB)	LENGTH
07	BLU-075S	S	5/8	4.31	1.75	1.63	.27	1.91	0.650	1.75

USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:


-45 FOR 45° BENT PAD -90 FOR 90° BENT PAD


-FL FOR FLARED BARREL ENTRY

-U FOR UNDRILLED PAD EXAMPLE: BLU-075S-FL

INK STAMP REFERENCE





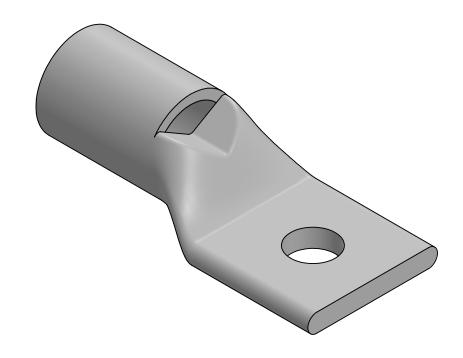

## NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



NO.	ECN	DATE
	REVISIO	NS

			Χ		COPPER TUBING						
	Q	TY.	'. PT. NAME C			ME OR DESCRI	E OR DESCRIPTION				
				PENN-CRIMP LUG							
					for 750 MCM COPPER CONDUCTORS						
					REF. DWG'S: 2H03-31403		H:\2H03\BLU-075\$				
					<b>.</b>	DRAWN BY: DT	DATE: 2/22/2023 CHK'D:	QJB			
			BLE	0.	PENNŮNION™	SCALE: 1:1 INTERI	PRET PER ASME Y14.5-2009   FILE:	2H03			
1			IAB	Ž.		SIZE: B	DIII 0750	REV.			
			SEE .	CAI	229 WATERFORD STREET EDINBORO, PA 16412 USA		BLU-075S	-			