




USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY
- -U FOR UNDRILLED PAD EXAMPLE: BLU-1S16-NT-FL



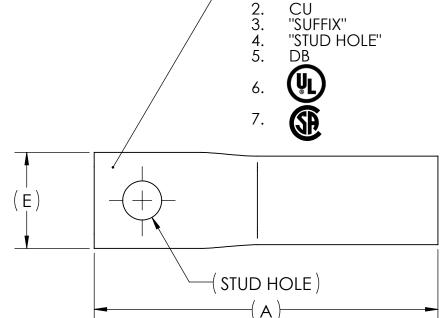



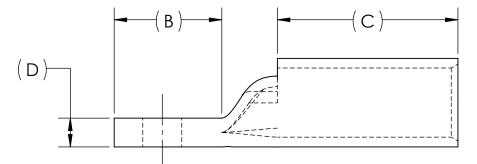

NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



				QTY.		PT	NAME OR DESCRIPTION					
							STANDARD BARREL NARROW TONGUE LUG					
							for					
			1 AWG COPPER CONDUCTORS						CONDUCTORS			
						REF. DWG'S: 2H03-56165 H:\2H03\BLU-1S-N		3\BLU-1S-NT				
								DRAWN BY:	DT DATE: 7/5/2023	CHK'D: QJB		
						뷞얼	PENNÚNION*	SCALE: 2:1	INTERPRET PER ASME Y14.5-2009	FILE: 2H03		
NO.	ECN	DATE			F	A I A	229 WATERFORD STREET	SIZE: B	g BLU-1S-N	REV.		
NO.	NO. ECN DATE REVISIONS		-		L L	CAT.	229 WATERFORD STREET EDINBORO, PA 16412 USA		g BLU-1S-N	Γ _		

COPPER TUBING

