

APPROX. **DIMENSIONS** STRIP REV. SUFFIX **WEIGHT** CAT. NO. STUD HOLE LENGTH Α В C D Ε (LB) BLU-2/0S20 2.06 .94 .12 06 S20 1/4 .81 .81 0.060 06 BLU-2/0S21 S21 5/16 2.06 .81 .94 .12 .81 0.059 1.06 3/8 2.11 .87 .12 10 BLU-2/0S S .94 .81 0.059 1/2 .12 80 BLU-2/0S4 \$4 2.37 1.12 .94 .81 0.063


INK STAMP REFERENCE






USE BELOW OPTIONAL SUFFIXES FOR **ALTERNATE LUG CONFIGURATIONS:**

-45 FOR 45° BENT PAD -90 FOR 90° BENT PAD



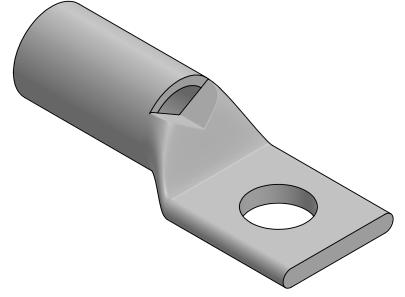

NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION 6.
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



NO. ECN DATE 229	
revisions	

