



|  | REV. | CAT. NO. | STUD HOLE | DIMENSIONS |      |      |      |      |      |             |
|--|------|----------|-----------|------------|------|------|------|------|------|-------------|
|  |      |          |           | Α          | В    | С    | D    | E    | F    | WEIGHT (LB) |
|  | -    | BLU-200D | 1/2       | 6.38       | 2.88 | 2.00 | ∅.47 | 3.06 | 1.75 | 2.720       |

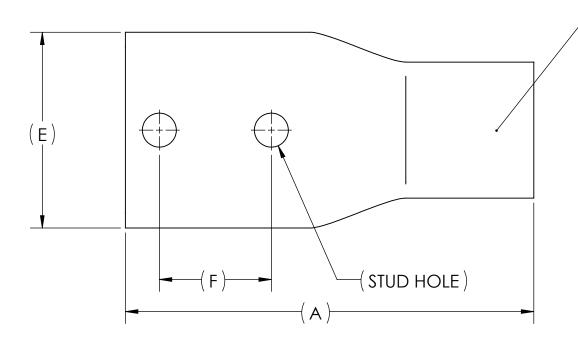

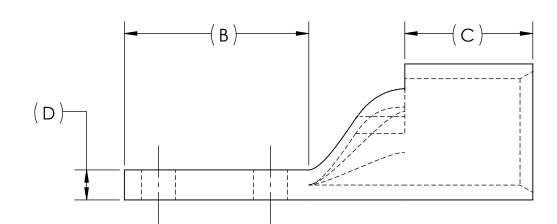

## METAL STAMP TO READ:

- PUC
- BLU-200D
- B-34
- 2000 MCM


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

- -45 FOR 45° BENT PAD
- -90 FOR 90° BENT PAD
- -FL FOR FLARED BARREL ENTRY -U FOR UNDRILLED PAD
- EXAMPLE: BLU-200D-FL



QTY.



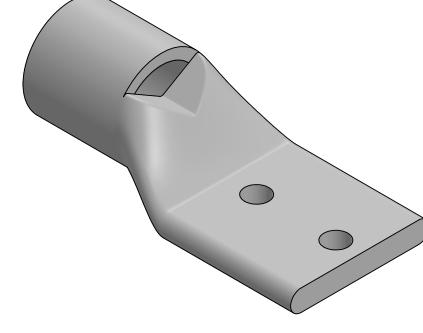

## **NOTES:**

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



|     |     |       |   | BLE                    | O          | PENNUNION"           |  |
|-----|-----|-------|---|------------------------|------------|----------------------|--|
| NO. | ECN | DATE  |   | Υ                      | <u>۲</u> . | 229 WATERFORD STREET |  |
|     |     | SE SE | C | EDINBORO, PA 16412 USA | 1          |                      |  |

COPPER TUBING NAME OR DESCRIPTION PENN-CRIMP LUG for 2000 MCM COPPER CONDUCTORS REF. DWG'S: H:\2H03\BLU-200D DATE: 7/27/2023 CHK'D: QJB DRAWN BY: QJB SCALE: 2:3 INTERPRET PER ASME Y14.5-2009 FILE: 2H03 **BLU-200D**