



NOTES:

(D)

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY 4.
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



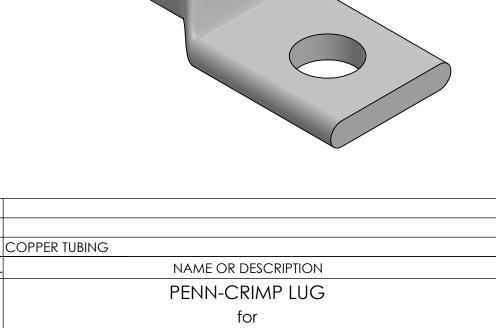

2 AWG COPPER CONDUCTORS

REF. DWG'S: 2H03-54754, 2H03-31386, 2H03-31387, 2H03-31388, 5H08-97826



ECN DATE 229 WATERFORD STREET REVISIONS EDINBORO, PA 16412 USA

QTY.

H:\2H03\BLU-2S

APPROX.

WEIGHT

(LB)

0.033

0.032

0.034

0.035

0.045

Ε

.59

.59

.59

.59

.82

STRIP

LENGTH

1.00