

REV.

APPROX. **DIMENSIONS** STRIP REV. **SUFFIX** WEIGHT CAT. NO. STUD HOLE LENGTH Ε В D Α (LB) 1.51 80 BLU-6S S .53 .81 .09 #10 .41 0.016 09 BLU-6S1 **S**1 1/4 1.67 .69 .81 .09 0.017 .41 .94 07 BLU-6S2 **S2** 5/16 1.78 .75 .82 .07 .45 0.017 80 BLU-6S8 \$8 3/8 1.97 88. .81 .06 .60 0.020

> ALTERNATE LUG CONFIGURATIONS: -45 FOR 45° BENT PAD -90 FOR 90° BENT PAD


-FL FOR FLARED BARREL ENTRY


USE BELOW OPTIONAL SUFFIXES FOR

-U FOR UNDRILLED PAD EXAMPLE: BLU-6S8-FL

PUC BLU BLUE B-7

INK STAMP REFERENCE



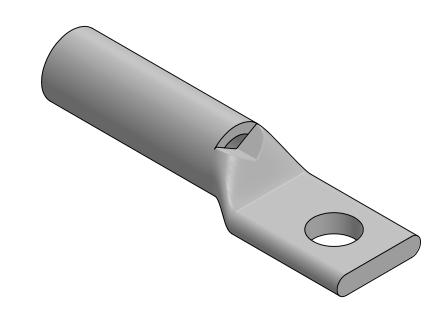

NOTES:

DWG.

BLU-6S

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY
- BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41



					\BLE	Ö	PENNUNION"
	NO.	ECN	DATE			-	229 WATERFORD STREET
	REVISIONS				SEE		EDINBORO, PA 16412 USA

QTY.

X COPPER TUBING

PT. NAME OR DESCRIPTION

PENN-CRIMP LUG

for

6 AWG COPPER CONDUCTORS

REF. DWG'S: 2H03-31380, 2H03-31381, 2H03-31382, 2H03-47379 H:\2H03/BLU-6S

DRAWN BY: DT DATE: 2/22/2023 CHK'D: QJB

SCALE: 3:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H03

SIZE: B

229 WATERFORD STREET
FDINBORO PA 16412 USA

REV.

BLU-6S

-