






	REV.	CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS					APPROX. WEIGHT	STRIP	
					Α	В	С	D	Е	(LB)	LENGTH	
	08	BLUA-040S2	S2	1/2	4.53	1.50	1.81	.42	1.63	0.911	2.00	
	08	BLUA-040S3	\$3	5/8	4.84	1.81	1.81	.42	1.63	0.959		

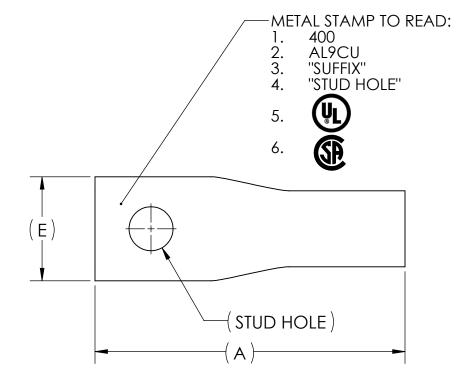

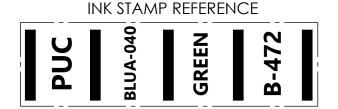

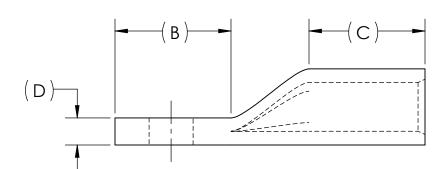



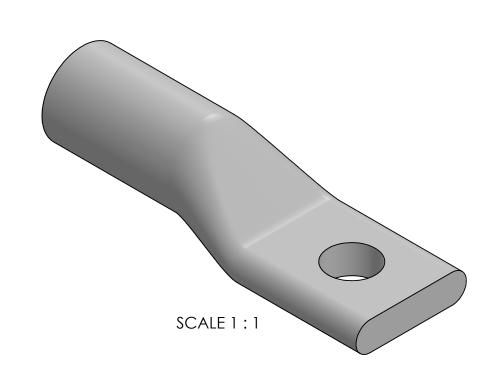

NAME OR DESCRIPTION

NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED AND FACTORY PREFILLED WITH OXIDE INHIBITOR
- 4. RATED FOR ALUMINUM AND COPPER CONDUCTORS UP TO 90°C
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. END CAPS PROVIDED TO PREVENT FOREIGN MATERIALS FROM ENTERING AND CONTAMINATING THE CONNECTOR PRIOR TO USE
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



					PENN-CRIMP LUG						
					for						
					400 MCM ALUMINUM AND COPPER CONDUCTORS						
					REF. DWG'S: 4H29-47798, 4H29-47765 H:\4H29\BLU						
ה					.	DRAWN BY: DT DATE: 6/29/2023 C	CHK'D: QJB				
		1 1	BLE	-	PENNŮNION™	SCALE: 2:3 INTERPRET PER ASME Y14.5-2009	FILE: 4H29				
<u>ש</u>	NO. ECN DATE REVISIONS		SEE TAB	CAT. N	229 WATERFORD STREET EDINBORO, PA 16412 USA	SIZE: B Significant BLUA-040S	REV.				

ALUMINUM TUBING

QTY.