


DWG. NO. **BLUA-075D** REV. -





REV.	CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS						APPROX. WEIGHT (LB)	STRIP LENGTH
				A	B	C	D	E	F		
10	BLUA-075D1	D1	1/2	6.31	3.13	2.25	.47	2.13	1.75	1.837	2.38
07	BLUA-075D	D	5/8	6.41	3.22	2.25	.47	2.13	1.75	1.831	

METAL STAMP TO READ:

1. 750
2. AL9CU
3. "SUFFIX"
4. "STUD HOLE"

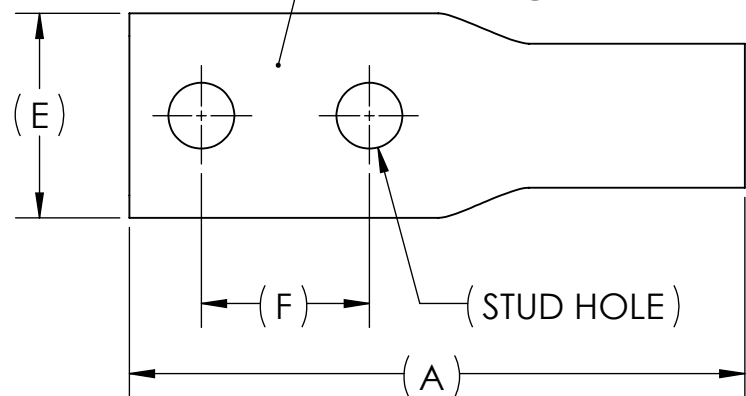

INK STAMP REFERENCE

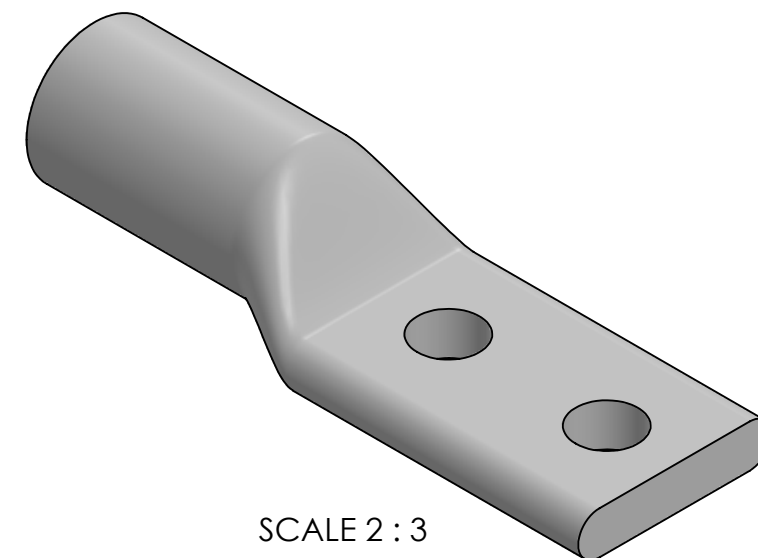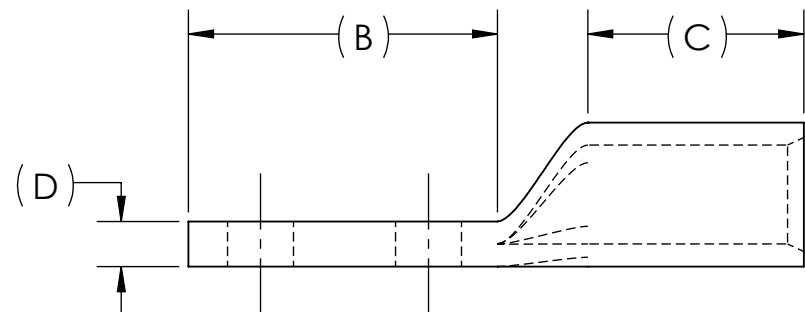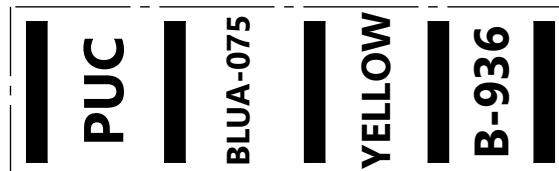

SCALE 2 : 3

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED AND FACTORY PREFILLED WITH OXIDE INHIBITOR
4. RATED FOR ALUMINUM AND COPPER CONDUCTORS UP TO 90°C
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. END CAPS PROVIDED TO PREVENT FOREIGN MATERIALS FROM ENTERING AND CONTAMINATING THE CONNECTOR PRIOR TO USE
7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



NO.	ECN	DATE
REVISIONS		

QTY.	PT.	NAME OR DESCRIPTION
	X	ALUMINUM TUBING
		PENN-CRIMP LUG for 750 MCM ALUMINUM AND COPPER CONDUCTORS
REF. DWG'S: 4H29-42953, 4H29-33758		H:\4H29\BLUA-075D
DRAWN BY: DT		DATE: 7/3/2023
SCALE: 1:2		CHK'D: QJB
INTERPRET PER ASME Y14.5-2009		FILE: 4H29
SIZE: B	DWG. NO. <b>BLUA-075D</b>	REV. -
 229 WATERFORD STREET EDINBORO, PA 16412 USA		