






	REV.	CAT. NO.	STUD HOLE			APPROX. WEIGHT	STRIP				
		CALNO.	STUD HOLE	Α	В	С	D	Е	F	(LB)	LENGTH
	08	BLUA-1D1	1/2	4.05	2.91	.91	.27	.83	1.75	0.232	1.06

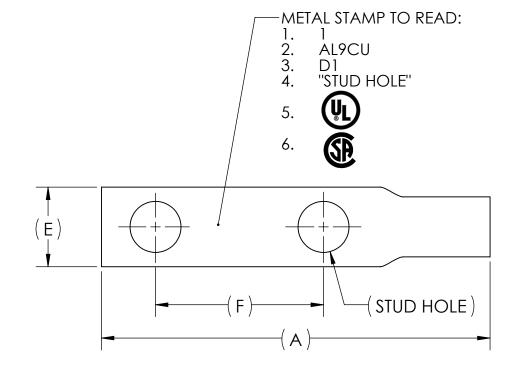



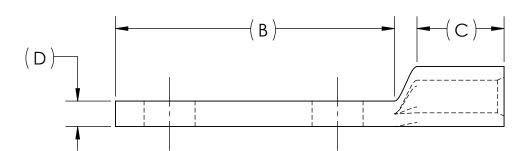



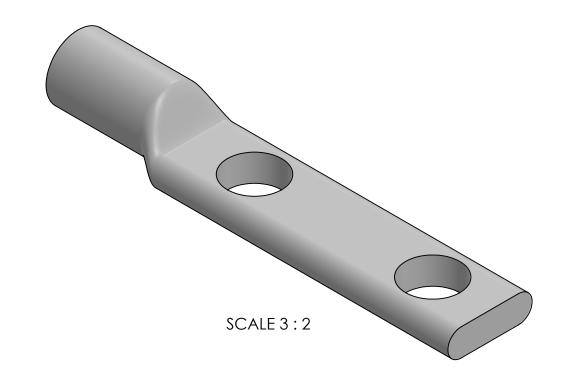

## NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED AND FACTORY PREFILLED WITH OXIDE INHIBITOR
- 4. RATED FOR ALUMINUM AND COPPER CONDUCTORS UP TO 90°C
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. END CAPS PROVIDED TO PREVENT FOREIGN MATERIALS FROM ENTERING AND CONTAMINATING THE CONNECTOR PRIOR TO USE
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



NO.	ECN	DATE				
	REVISIO	revisions				
				Τ		

				Χ		ALUMINUM TUBING									
		Q	TY.		PT.	N.A	NAME OR DESCRIPTION								
						PE	NN-C	RI	MP LUC	<del>j</del>					
								for							
						1 AWG ALUMINU	M ANI	) C	OPPER	COND	UCTO	RS			
						REF. DWG'S: 4H29-50957						H:\4H29\BLUA-1D			
							DRAWN	BY: (	QJB D	ATE: 6/2	1/2023	CHK'D:	QJB		
				ABLE	0.	<b>PENNUNION</b>	SCALE: 1	:1	INTERPRET P	ER ASME	Y14.5-2009	FILE:	4H29		
rF.				ſAB	ž		SIZE: B	()			10		REV.		
IE.				SEE 1	CAT	229 WATERFORD STREET EDINBORO, PA 16412 USA	$\oplus \Box$	DWG	ġ B	SLU A	1-1D		_		