







DWG. NO. **BLUA-2/0D** REV. **-**

REV.	CAT. NO.	SUFFIX	STUD HOLE	DIMENSIONS						APPROX. WEIGHT (LB)	STRIP LENGTH
				A	B	C	D	E	F		
06	BLUA-2/0D2	D2	3/8	3.38	1.88	1.09	.25	.94	1.00	0.214	1.25
09	BLUA-2/0D	D	1/2	4.62	3.18	1.09	.25	.94	1.75	0.289	

METAL STAMP TO READ:

1. 2/0
2. AL9CU
3. "SUFFIX"
4. "STUD HOLE"
5. 
6. 

INK STAMP REFERENCE

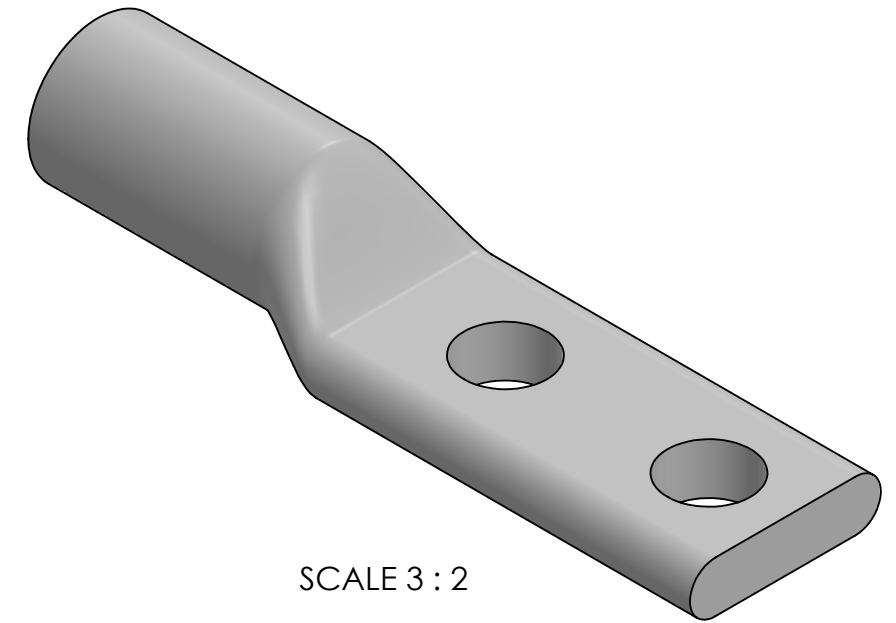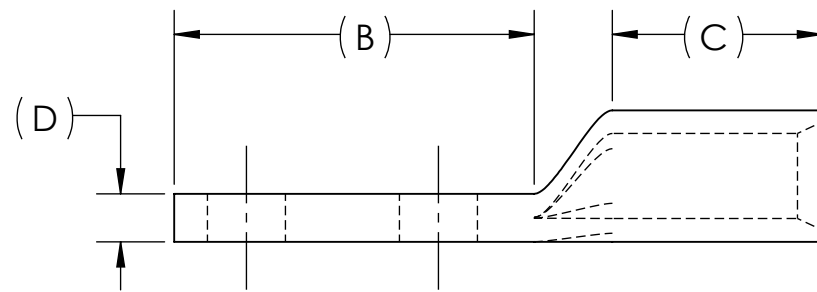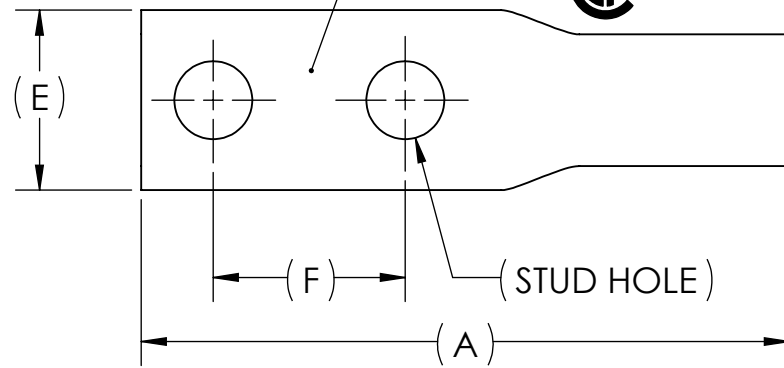

SCALE 3 : 2

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED AND FACTORY PREFILLED WITH OXIDE INHIBITOR
4. RATED FOR ALUMINUM AND COPPER CONDUCTORS UP TO 90°C
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. END CAPS PROVIDED TO PREVENT FOREIGN MATERIALS FROM ENTERING AND CONTAMINATING THE CONNECTOR PRIOR TO USE
7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
8. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
9. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



NO.	ECN	DATE
REVISIONS		

		X		ALUMINUM TUBING	
QTY.	PT.	NAME OR DESCRIPTION			
		PENN-CRIMP LUG			
		for			
		2/0 AWG ALUMINUM AND COPPER CONDUCTORS			
		REF. DWG'S: 4H29-47761, 4H29-39153		H:\4H29\BLUA-2.0D	
		DRAWN BY: DT		DATE: 6/21/2023	
		SCALE: 1:1		INTERPRET PER ASME Y14.5-2009	
		SIZE: B		FILE: 4H29	
		DWG. NO. BLUA-2/0D		REV. -	
		SEE TABLE		CAT. NO.	
		PENNUNION™		229 WATERFORD STREET EDINBORO, PA 16412 USA	