



CAT. NO.	STUD HOLE	DIMENSIONS					APPROX. WEIGHT (LB)
		A	B	C	D	E	
BLY2C-L3	#10	1.73	.75	.63	.08	.64	0.030
BLY2C-L1	1/4	1.73	.75	.63	.08	.64	0.030
BLY2C-L2	5/16	1.73	.75	.63	.08	.64	0.029
BLY2C-L	3/8	1.73	.75	.63	.08	.64	0.028
BLY2C-L4	1/2	1.90	.90	.63	.08	.74	0.031

INSTALLATION TOOLING						
MECHANICAL		HYDRAULIC			T & B	
BURNDY	PENN-UNION DIELESS MECHANICAL TOOL	PENN-UNION	DIE INDEX	BURNDY Y35 Y39	TOOL: 13642	
NON-RATCHET: MY29-11	TDM-250XF	TPU-12B	41	UV2L NEST Y34PLA INDENTOR (1)CRIMP	DIE CAT. NO. 11784M	DIE MS90485- -2



- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
  - TIN-PLATED TO INHIBIT CORROSION
  - RATED FOR COPPER CONDUCTORS ONLY
  - BEVELED ENTRY FOR EASY CABLE INSERTION
  - INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
  - ROUNDED TONGUE ACCOMMODATES FULL WASHER CLEARANCE AND ADJUSTABLE LUG ORIENTATION
  - CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
  - FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
  - CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C

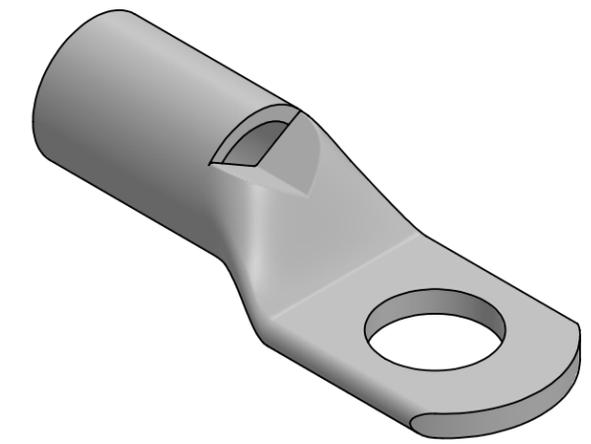

NO.	ECN	DATE
7	11639	3/9/2016
6	11516	11/6/2014
5	11227	11/21/2011
4	9995	9/18/1996
3	9818D	4/13/1995
2	9688	2/21/1994
1	9347	8/16/1991

QTY.	PT.	NAME OR DESCRIPTION
	X	COPPER TUBING
		PENN-CRIMP LUG for 2 AWG AND AN 2
REF. DWG'S: 2H19-54304		H:\2H19\BLY2
DRAWN BY: DT		DATE: 6/19/2023
SCALE: 2:1		INTERPRET PER ASME Y14.5-2009
SIZE: B		FILE: 2H19
DWG. NO. <b>BLY2</b>		REV. <b>7</b>