


(D)	
<u> </u>	<i>L</i> ===,


NOTES:

- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- TIN-PLATED TO INHIBIT CORROSION
- RATED FOR COPPER CONDUCTORS ONLY
- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- INSPECTION WINDOW TO ENSURE FULL CABLE INSERTION
- 7. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
- 10. CONNECTORS ARE ULLISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL **APPLICATIONS PER UL467**
- 11. CONNECTORS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41

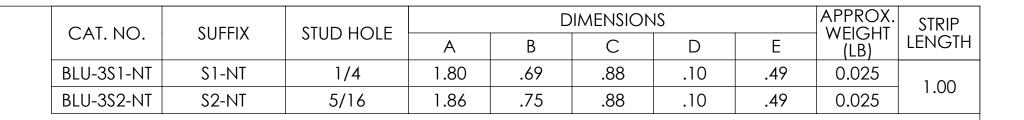


INK STAMP REFERENCE









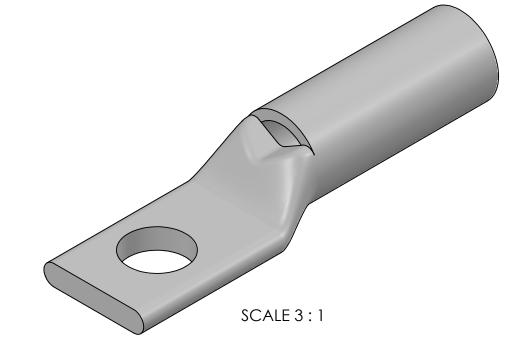


USE BELOW OPTIONAL SUFFIXES FOR ALTERNATE LUG CONFIGURATIONS:

REV.

-FL FOR FLARED BARREL ENTRY

-45 FOR 45° BENT PAD -90 FOR 90° BENT PAD

-U FOR UNDRILLED PAD EXAMPLE: BLU-3S1-NT-FL

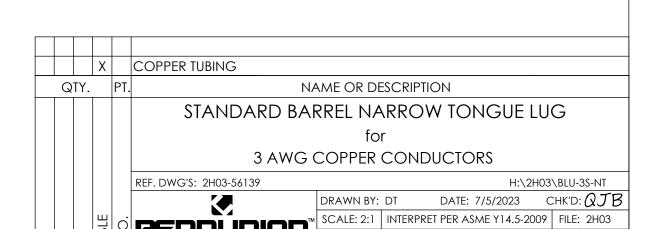

SIZE: B

229 WATERFORD STREET

EDINBORO, PA 16412 USA

DWG.

BLU-3S-NT





ECN

REVISIONS

DATE